


CE 30kW DC Charger

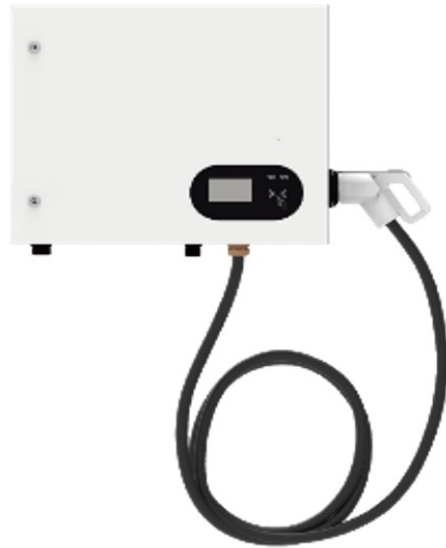

Application Scenario

Garage for home use,
Public Charging station.

Functional Characteristics

Innovativeness

- Anti-theft lock design, special unlock
- Home or business use by App
- Faster charging with smaller installation space

Flexible Option

- Wall-mount/Floor stand (optional)
- Start mode: RFID/ Plug & Play(Password)

Secure and Safety

- Modular design, easy to repair and replace
- Emergency stop switch, improve the safety

Intelligent Control

- Load balance system control
- OCPP communication protocol with CMS

Technical Parameter

30kW DC Charger		
Input	Power Supply	3P+N+PE
	Rated Voltage	400V AC
	Rated Current	45A
	Frequency	50/60Hz
Output	Output Voltage	150~1000V DC
	Maximum Current	75A
Basic Feature	Rated Power	30kW
	Connector	CCS2
	Cable Length	5m
	Enclosure	Galvanized steel
	LED Indicator	Green/Red/Yellow
	LCD Display	4.3" color touch screen
	Start Mode	Plug & Play /RFID card
	Communication	WiFi /Ethernet
	OCPP	OCPP 1.6 J
	Ingress Protection	IP54
	Electrical Protection	Over current protection, Residual current protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over temperature protection
	Installation	wall-mount/pole mount(optional)
	Noise	≤60dB
	Work Temperature	-30℃~+50℃
Work Humidity	5%~95%RH	
Altitude	< 2000m	
Product Dimension	707*560*217mm (W*D*H)	
Net Weight	35.3 kg	
External Package	Carton	